



US006444295B1

(12) **United States Patent**  
**Peng et al.**

(10) **Patent No.:** **US 6,444,295 B1**  
(45) **Date of Patent:** **Sep. 3, 2002**

(54) **METHOD FOR IMPROVING INTEGRATED CIRCUITS BONDING FIRMNESS**

(75) Inventors: **Jeng-Jie Peng**, Tao-Yuan; **Ming-Dou Ker**; **Nien-Ming Wang**, both of Hsinchu, all of (TW)

(73) Assignee: **Industrial Technology Research Institute**, Hsinchu Hsien (TW)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **09/221,569**

(22) Filed: **Dec. 29, 1998**

(51) Int. Cl.<sup>7</sup> ..... **B32B 3/00**; H01L 23/48

(52) U.S. Cl. .... **428/209**; 257/774; 257/784; 257/786

(58) Field of Search ..... 257/773, 774, 257/782, 784, 786; 428/209; 228/180.5

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,045,919 A \* 9/1991 Nagaoka ..... 357/72

5,430,329 A \* 7/1995 Harada et al. .... 257/786  
5,686,762 A 11/1997 Langley ..... 257/775  
5,695,592 A 12/1997 Rouaud et al. .... 156/279  
5,707,894 A \* 1/1998 Hsiao ..... 438/614  
5,753,975 A \* 5/1998 Matsuno ..... 257/751  
5,874,779 A \* 2/1999 Matsuno ..... 257/758

\* cited by examiner


Primary Examiner—Cathy Lam

(74) Attorney, Agent, or Firm—McDermott, Will & Emery

(57) **ABSTRACT**

A method for improving the integrated circuits bonding firmness, whose principle is that after the later film is piled on top of the previous film, the upper surface of the later film will be affected by the previous film. Among the metal layers of the multi-level interconnection, the metal layer under and most close to the bond pad metal (the top metal layer of the multi-level interconnection) has a regular or an irregular layout pattern, which is under the predetermined regions serving as bond pad windows. These regular or irregular layout patterns result in a rough upper surface, and then improves the firmness of bond wires.

**7 Claims, 12 Drawing Sheets**

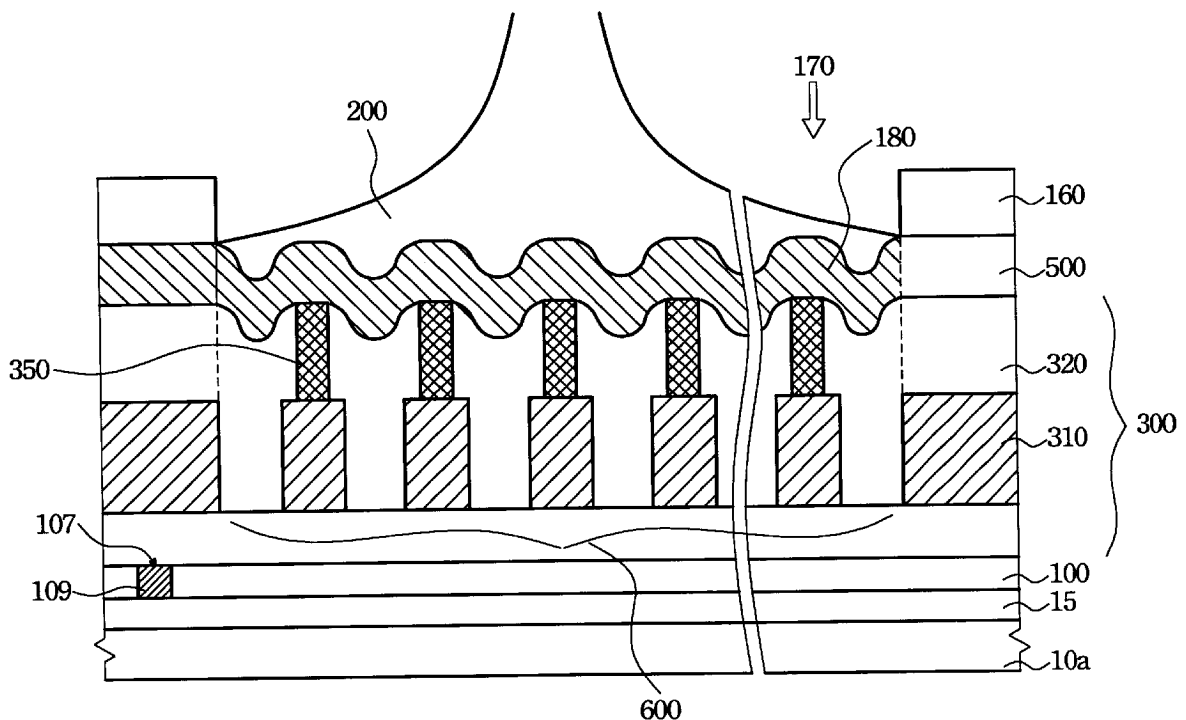

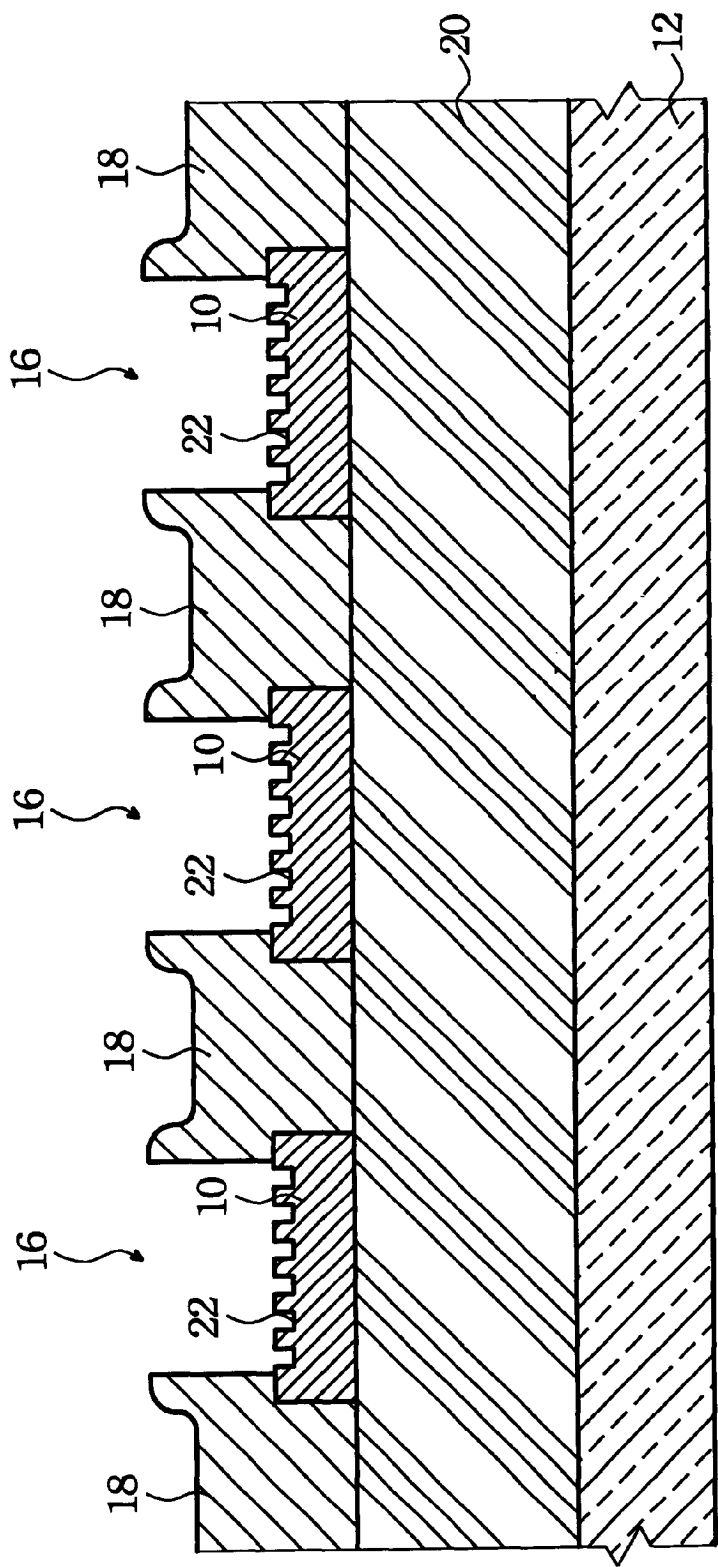


Fig.1  
(Prior Art)

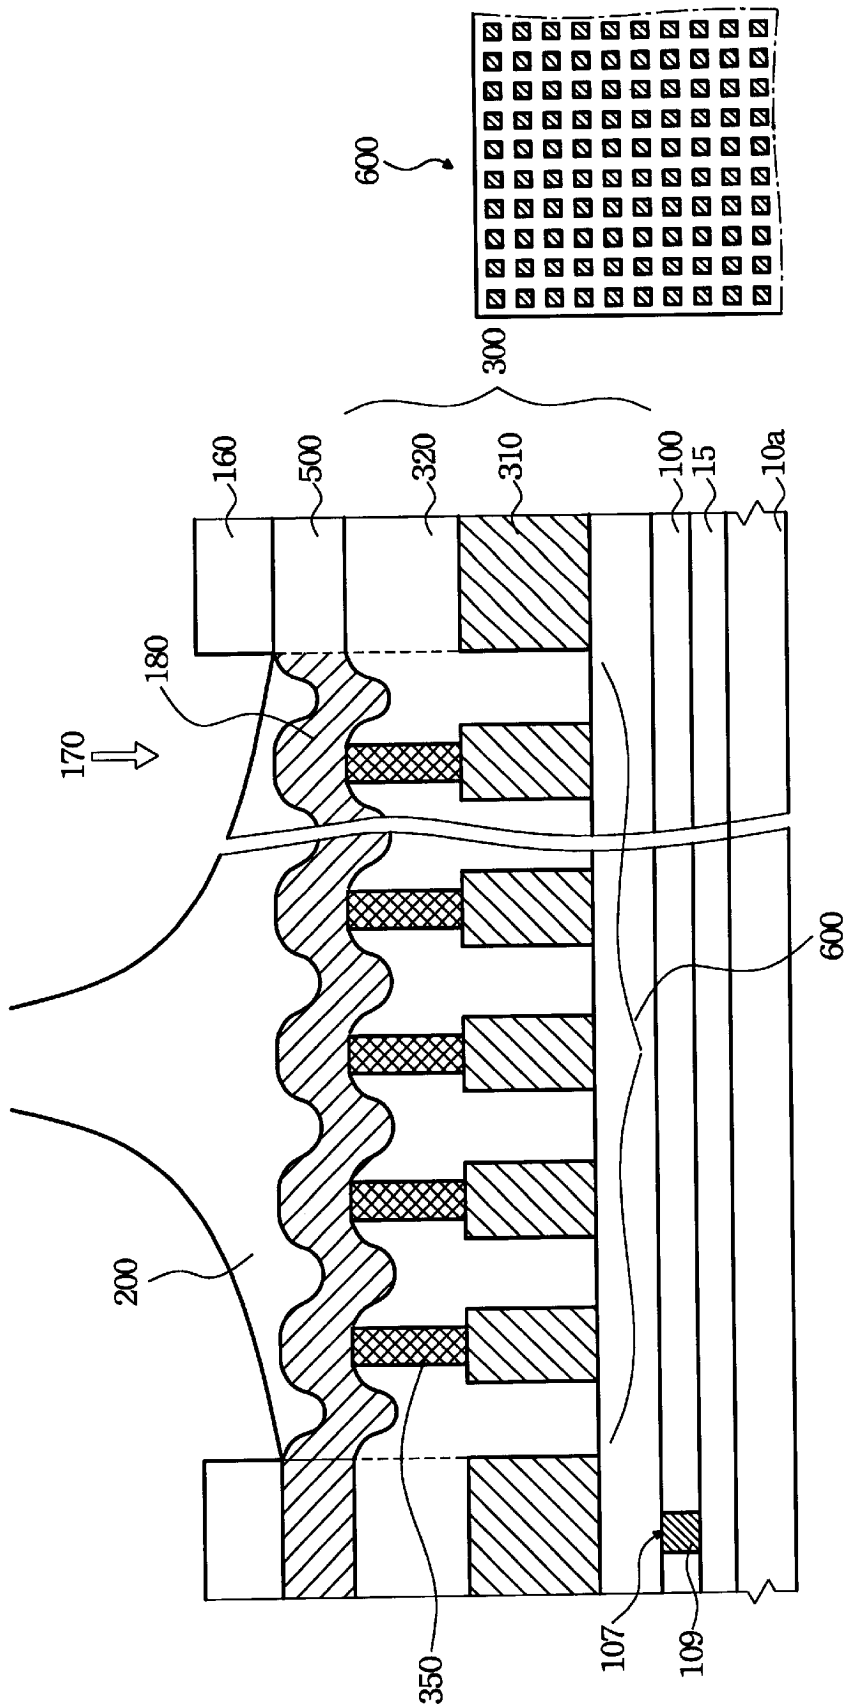


Fig.2(a)



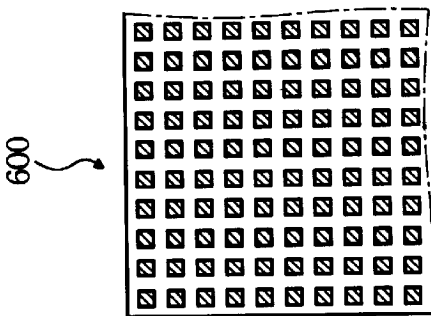


Fig.2(b)

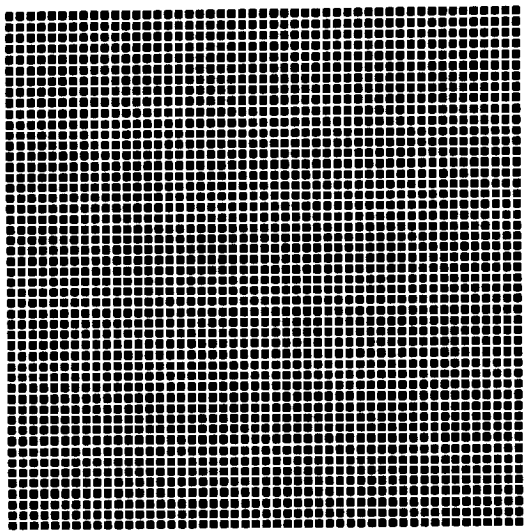


Pad - 02

Fig.3(a)

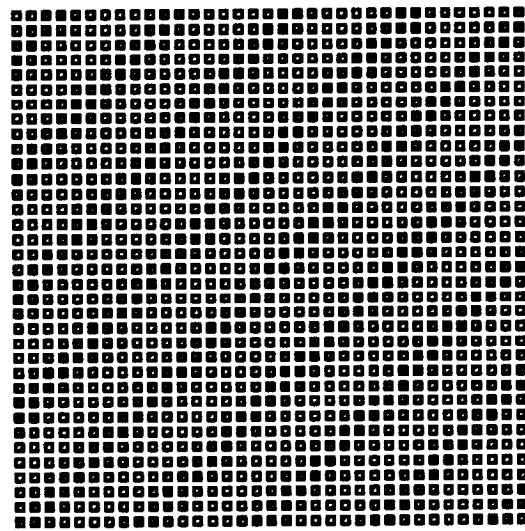


Pad - 04

Fig.3(b)

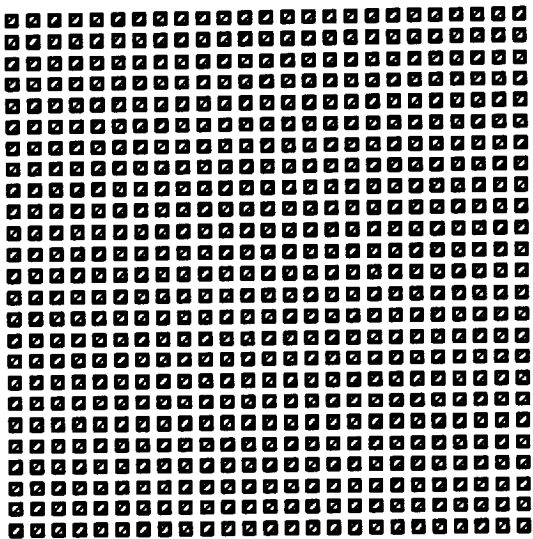


Pad - 06

Fig.3(c)

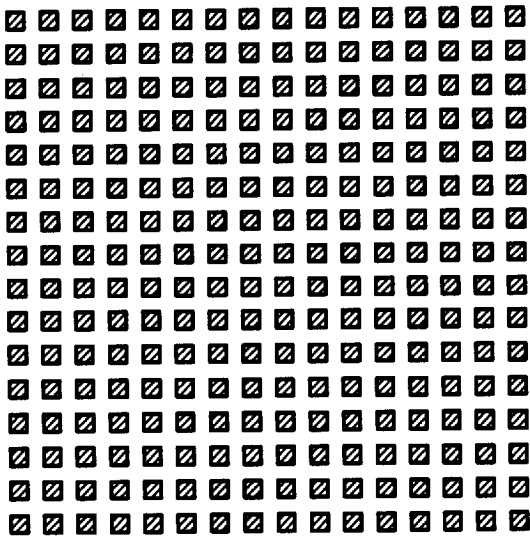


Pad - 08

Fig.3(d)

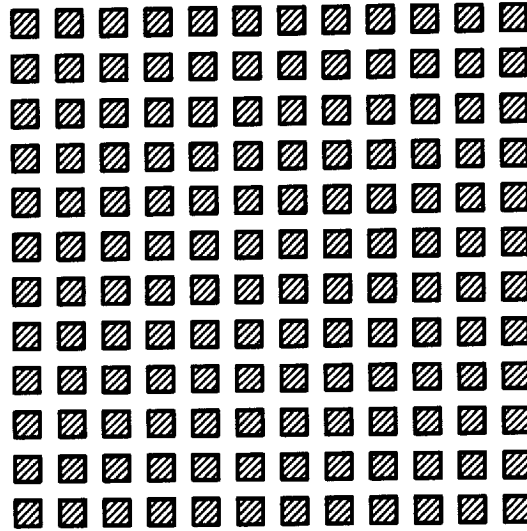


Pad - 10

Fig.3(e)

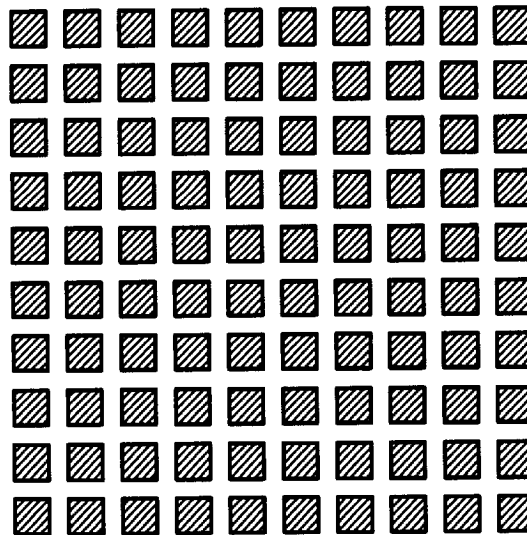


Pad - 12

Fig.3(f)

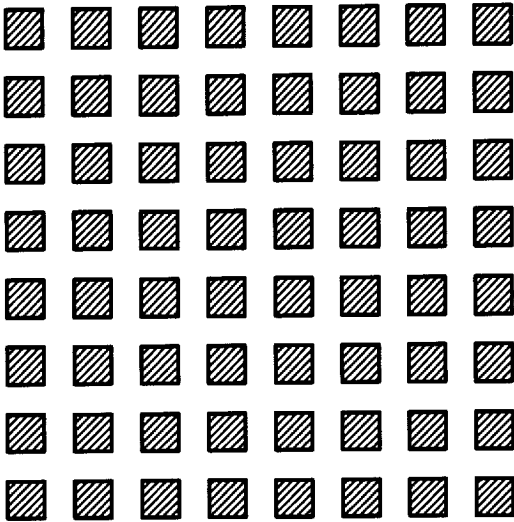


Pad - 14

Fig.3(g)

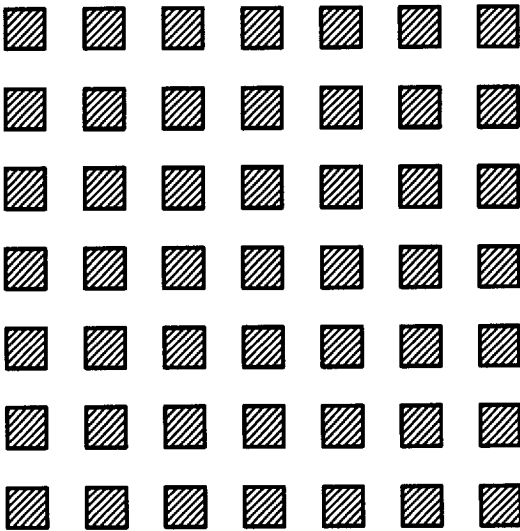


Pad - 16

Fig.3(h)

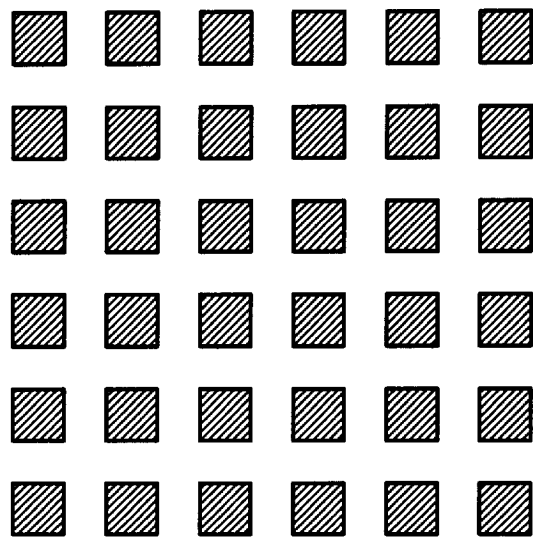

Pad - 18


Fig.3(i)

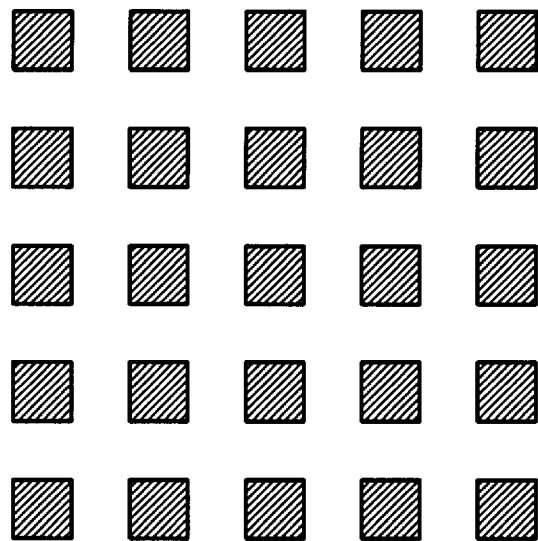

Pad - 20


Fig.3(j)



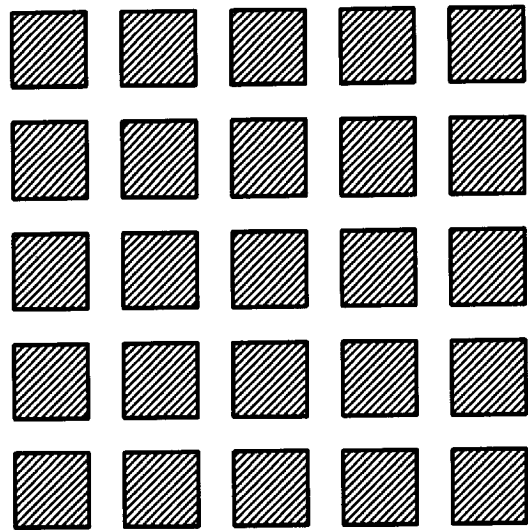


Pad - 22

Fig.3(k)

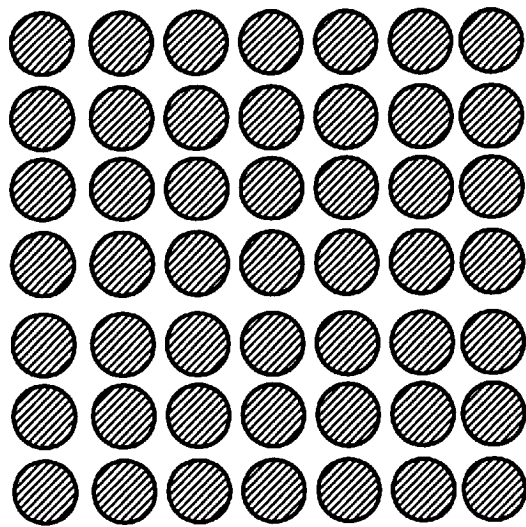


Pad - 24

Fig.3(l)

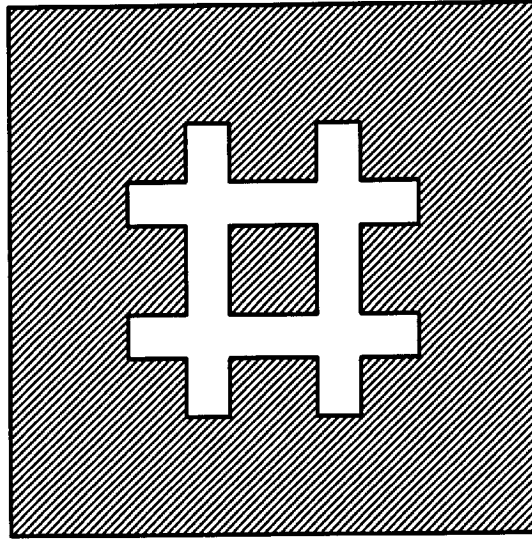


Pad - 26

Fig.3(m)

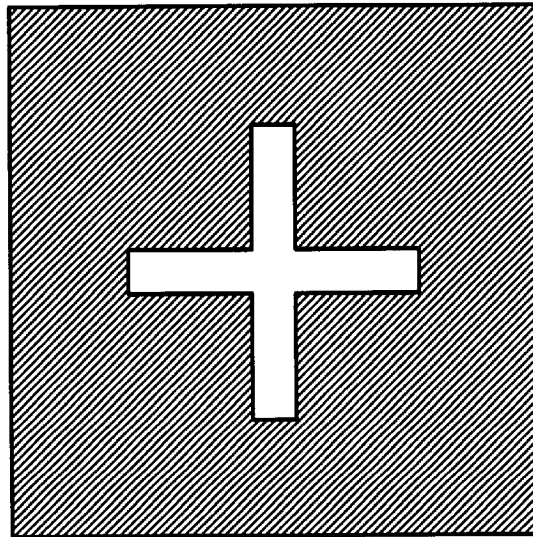


Pad - 28

Fig.3(n)

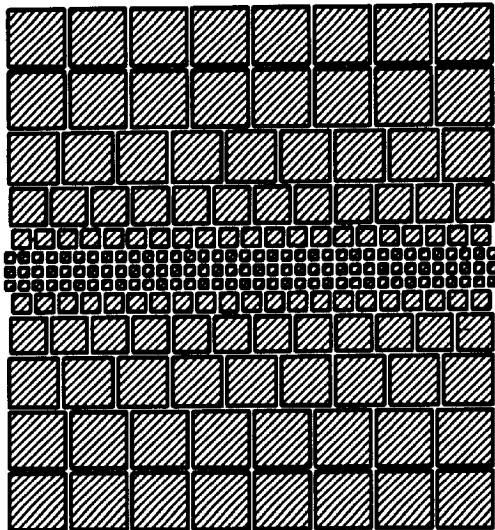


Pad - 30

Fig.3(o)

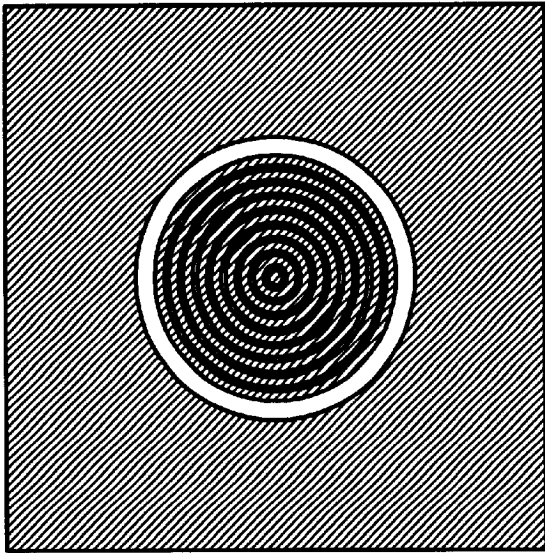


Pad - 32

Fig.3(p)

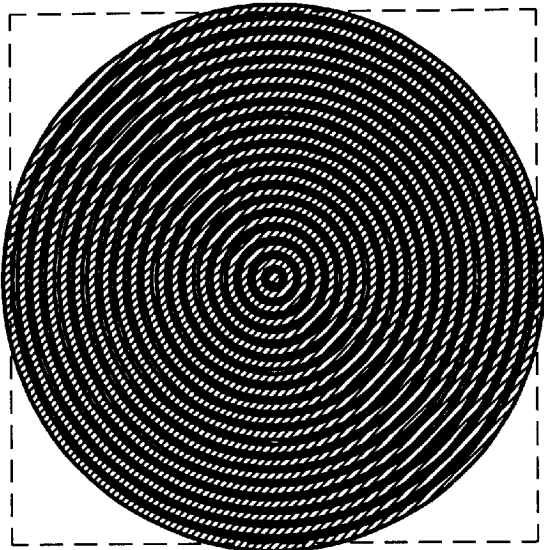


Pad - 34

Fig.3(q)

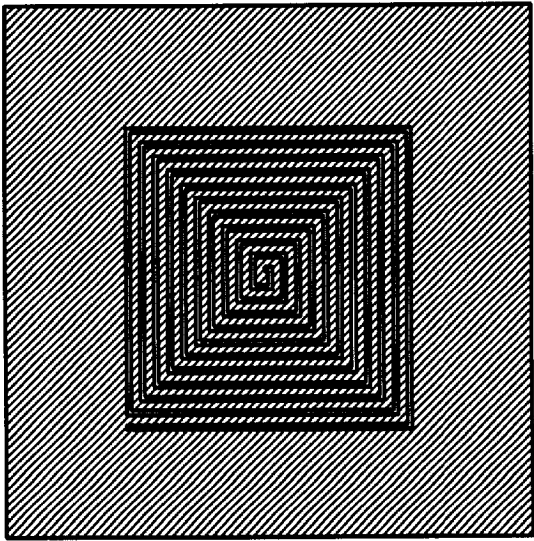


Pad - 36

Fig.3(r)

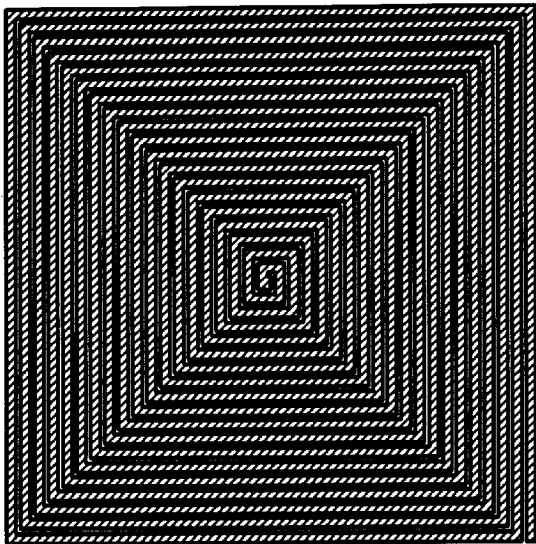

Pad - 38

Fig.3(s)

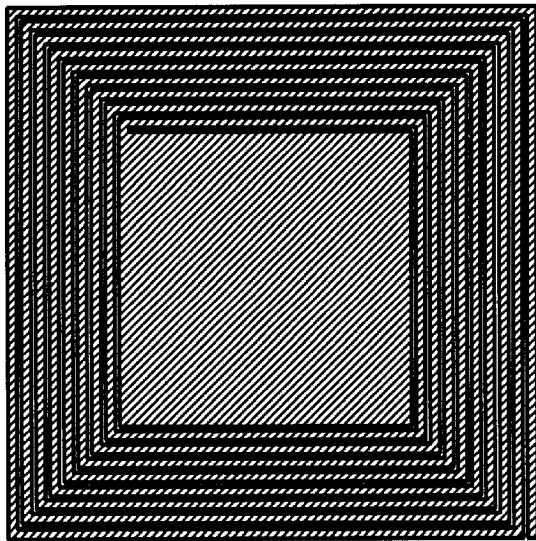

Pad - 40

Fig.3(t)

## 1

METHOD FOR IMPROVING INTEGRATED  
CIRCUITS BONDING FIRMNESS

## BACKGROUND OF THE INVENTION

## 1. Field of the Invention

The present invention relates to a method for improving integrated circuits bonding firmness and, more particularly, to regular or irregular layout patterns formed under bond pads.

## 2. Description of the Prior Art

As the increment of integration, the multi-level interconnection must be used for the coupling of internal circuits during the fabrication of semiconductor devices because that the single metal connect is not sufficient for using. In general, many semiconductor devices utilize bond pads and bond wires to form the electrically coupling between internal and external circuits. Because the bond pads are formed on the upper metal layer of the multi-level interconnection, the upper metal layer of the multi-level interconnection are usually called as "bond pad metal layer". The formation of bond pads includes photolithography and etching processes to form bond pad windows in the passivation layer, which covers the devices formed previously, and then expose the predetermined areas located in the "bond pad metal layer". After the bond pad windows are formed, thin wires are bonded into the bond pad windows to couple with the predetermined areas served as bond pads.

The bond wires are tensioned and sheared during the devices are packaged, which may cause the peeling of bond wires and thus bring about the failure of the devices. There are many prior arts to solve the foregoing problem. For example, the U.S. Pat. No. 5,695,592 (Dec. 9, 1997) entitled "Method of adhesively bonding mineral particles to support" or the U.S. Pat. No. 5,700,581 (Dec. 23, 1997) entitled "Solvent-free epoxy based adhesives for semiconductor chip attachment". Another method is to modify the structure of bond pads for increasing firmness of bond wire. For example, the U.S. Pat. No. 5,686,762 (Nov. 11, 1997) titled "Semiconductor device with improved bond pads". Among these methods, the U.S. Pat. No. 5,686,762 is described accompanied with the FIG. 1. At least one opening is formed in the bonding surface of bond pads and the opening(s) may recesses extending partially into the bonding surface or channels that extend entirely through the bond pad. This method increases the firmness of bond wire efficiently but additional steps are needed during the forming of opening(s). Such as an additional photomask of the opening(s) pattern—additional photolithography process—removal of the photoresistor and etching processes process and so on. In FIG. 1, the object 12 is an internal circuit; the object 16 is the bond pad window the object 18 is a passivation layer and the object 20 is an insulator layer.

The method disclosed in the present invention is easier than aforesaid methods, because additional steps or cost is not necessary for the present invention. The feature of the present invention is to make the bonding surface of metal layer under and most close to the bond pad layer (the top metal layer of multi-level interconnection) rough, which leads to improving the firmness of bond wire. The principle of roughness process is, under the predetermined regions serve as bond pads, to form a metal layer with regular or irregular layout patterns. It's worthy to note that the roughness process is implemented in the meanwhile of the deposition of the metal layer under the bond pad layer. In other words, it doesn't require additional steps or cost because the photomasks of layout pattern and that of metal layer are the same one.

## 2

## SUMMARY OF THE INVENTION

During the devices are packaged, the break of bond wires or the peeling of bond pads occurs frequently and thus result in the failure of the devices. In order to improve the firmness of bond wires, the present invention discloses a method, which makes the metal layer under and most close to the bond pad metal layer (the upper metal layer of multi-level interconnection) rough. The method of making rough is, under the bond pad metal, to form a metal layer with regular or irregular layout patterns to result in the undulation of upper surface. The bonding surface of later bond pads formed on the metal is affected by the undulation, and thus improves the firmness of bond wires.

The preferred embodiment of the present invention is described as follow. An internal circuit is formed on a substrate by conventional method. This internal circuit comprises several metal-oxide semiconductors (MOSs) or other semiconductor devices. An insulator layer is formed on the internal circuit and then several contact holes are formed in the insulator layer by photolithography and etching processes. Several plugs are formed in the contact holes and couple to the internal circuit. A composition layer is formed, which serves as a part of the multi-level interconnection. The composition layer is composed with at least one metal layer and at least one inter-metal dielectric layer (IMD), and each film of the composition layer is piled on top of each other. The bottom and the top of the composition layer are a metal layer and a dielectric layer, respectively. There are several vias and several via plugs in each inter-metal dielectric layer, and these via plugs serve to make the metal layers coupling to the internal circuit. It's worthy to note that, under the specific regions serving as bond pads, the top metal layer of the composition layer has a regular or an irregular layout pattern.

The method disclosed in the present invention is applied in multi-level interconnection. If the number of metal layers of the multi-level interconnection are 3, the number of metal layers of the composition layer are 2; the inter-metal dielectric layers (IMD) of the composition layer serve as isolation and whose number are 2, too.

A bond pad layer is formed on the composition layer. Then a passivation layer is formed on the bond pad layer. The passivation layer serves to protect the internal circuit from moisture and alkali ions. Then by photolithography and etching processes; bond pad windows are formed in the passivation layer to expose the bond pad layer. Finally, the bond wires are bonded to the bond pads.

After the aforesaid steps are finished, a test machine was used to test the firmness of the bond wires. The test result reveals that no matter whether ball shear test or wire pull test, the bond pads using present invention satisfy the industrial standard (wire pull is 5 mg and ball shear is 30 mg)

## BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated as the same becomes better understood by reference to the following detailed description when taken in conjunction with the accompanying drawings, wherein:

FIG. 1 is a cross section view of a bond pad structure of prior art.

FIG. 2(a) is a cross section view of a bond pad structure of present invention.

FIG. 2(b) is a simplified layout pattern of the present invention.

FIG. 3(a) is the practical layout pattern of FIG. 2(b), and  
FIGS. 3(b)to(t) is the other layout patterns of present  
invention.

DESCRIPTION OF THE PREFERRED  
EMBODIMENT

A multi-level interconnection structure will be employed  
below to illustrate the preferred embodiment of present  
invention. Referring to FIG. 2(a), an internal circuit 15  
is formed on a substrate 10a by using conventional method.  
This internal circuit 15 comprises several metal-oxide semi-  
conductors (MOSs) or other semiconductor devices. An  
insulator layer 100 is formed on the internal circuit 15  
and then several contact holes 107 are formed in the insulator  
layer 100 by photolithography and etching processes. Sev-  
eral plugs 109 are formed in the contact holes 107 and  
couple with the internal circuit 15.

Still referring to FIG. 2(a), a composition layer 300 is  
formed, which serves as a part of the multi-level intercon-  
nection. The composition layer 300 is composed with at  
least one metal layer and at least one inter-metal dielectric  
layer (IMD). The bottom and the top of the composition  
layer 300 are the metal layer 310 and the dielectric layer 320,  
respectively. There are a plurality of vias and a plurality of  
via plugs 350 in each inter-metal dielectric layer, which  
serve to make the metal layers of said composition layer 300  
coupling to the internal circuit 15. It's worthy to note that,  
in some specific regions of the surface, the upper metal layer  
310 of the composition layer 300 includes a regular or an  
irregular layout pattern 600 formed thereon (as shown in  
FIG. 2(b)). The purpose of the layout pattern 600 is to form  
a rough upper surface and thus to increase the firmness of  
subsequent wire bonds 200 formed thereon. This process is  
referred to "the roughened process", and the specific regions  
are under the regions 180 which serve as bond pads.

The reasons why the metal layer 310 is selected to  
proceed "the roughened process" are described as follow:  
Because the metal layer 310 is the layer under and most  
close to the bond pads 180, the influence of the metal layer  
310 on roughness of bond pads 180's bonding surface is the  
most efficient than other layers. Another reason is that if  
forming the regular or irregular layout pattern 600 on bond  
pads 180's bonding surface, thus will reduce of the area of  
bond pads 180 and also the performance of current-  
transmitting.

Still referring to FIG. 2(a), a bond pad layer 500 is formed  
on the composition layer 300. Then a passivation layer 160  
is formed on the bond pad layer 500. The passivation layer  
160 serves to protect the internal circuit 15 from moisture  
and alkali ions. Then bond pad windows 170 are formed in  
the passivation layer 160 to expose the bond pads 180 by  
photolithography and etching processes. The dimensions of  
the bond pads 180 are 96x96 micrometer square as an  
example. Of course, other dimensions can be used. Finally,  
bond wires 200 are bonded to the bond pads 180 to couple  
to the external circuit (not shown).

In the present embodiment, the layout pattern 600 shown  
in FIG. 2(b) is marked "pad-02", which is simplified for  
showing the drawing simply. The practical pattern of pad-02  
is shown in FIG. 3(a) and also marked "pad-02". The other  
layout patterns shown in FIGS. 3(b) to (t) is marked "pad-  
04"-"pad-06" . . . and "pad-40", respectively. These layout  
patterns include: a matrix composed with a plurality of  
squares(serial numbers are "pad-02"-"pad-04" . . . "pad-22"

and shown in FIGS. 3(a)to(k)). The dimensions of squares  
belong to the same serial number are the same, but the  
dimensions of squares belong to different serial number are  
different from each other. A matrix composed with a plu-  
rality of round dots (serial number is "pad-24" and shown in  
FIG. 3(l)); A "#" shaped ditch (serial number is "pad-26"  
and shown in FIG. 3(m)); A cross shaped ditch (serial  
number is "pad-28" and shown in FIG. 3(n)); An irregular  
pattern composed with a plurality of squares with several  
dimensions (serial number is "pad-30" and shown in FIG.  
3(o)); Patterns composed with a plurality of concentric rings  
(serial numbers are "pad-32"-"pad-34" and shown in FIGS.  
3(p)to(q), respectively ) and irregular polygons (serial num-  
bers is "pad-36" to "pad-40" and shown in FIGS. 3(r)to(t),  
respectively). On the wafer 100b and 100c, the above-  
mentioned steps forming bond pads 180 proceed repeatedly  
to make a comparison. It's worthy to note that the metal  
layers of present invention is a preferred embodiment, and  
other conductive materials suiting to serve as the multi-level  
interconnection are included in the scope of the present  
invention.

For comparing bond pads of the present invention with  
that of convention, in the meanwhile, a plurality of general  
bond pads are formed on the wafers named 100a-100b and  
100c by conventional process. These general bond pads are  
marked serial numbers "pad-01"-"pad-03" . . . "pad-39" and  
whose total numbers are 20, too. Except forming the regular  
or irregular layout pattern, the remainder steps to form these  
general bond pads are the same with the forming process of  
bond pads 180 "pad-02"-"pad-04" . . . "pad-40".

A test machine was utilized to exam the firmness of the  
bond wires. The test result listed in Table-1(a)and Table-1(b)  
reveal that no matter whether wire pull test or ball shear test,  
the bond pads of present invention (pad-02-pad-04 . . .  
pad-40) satisfy the industrial standard (wire pull is 5 mg and  
ball shear is 30 mg). Some bond pads of the present  
invention are more excellent than that of convention (pad-  
01-pad-03 . . . pad-39), and the test results of conventional  
bond pads are listed in Table-2(a) and Table-2(b), respec-  
tively. Hence it appears that the bond pads of the present  
invention are conducive to the firmness of bond wire.

TABLE-1(a)

The wire pull test of the present invention (unit : mg)				
	wafer 100a	wafer 100b	wafer 100c	average
pad-02	8.8	9.3	8.3	8.80
pad-04	7.5	9.9	8.5	8.63
pad-06	9.8	11.0	10.05	10.43
pad-08	9.9	9.9	9.5	9.77
pad-10	9.6	9.4	9.8	9.60
pad-12	9.4	8.7	8.7	8.93
pad-14	8.9	9.5	8.6	9.00
pad-16	9.8	9.3	8.7	8.93
pad-18	9.3	9.5	8.8	9.20
pad-20	8.9	9.1	8.7	8.90
pad-22	8.1	9.0	8.5	8.53
pad-24	9.5	9.8	8.8	9.37
pad-26	9.2	9.1	7.6	8.63
pad-28	9.4	8.9	8.0	8.77
pad-30	8.1	8.2	7.7	8.00
pad-32	6.8	7.4	6.1	6.77
pad-34	7.2	7.7	6.9	7.27
pad-36	7.7	6.1	6.9	6.90
pad-38	7.4	7.0	7.5	7.30
pad-40	8.4	7.9	7.3	7.86

TABLE-1(a)

The ball shear test of the present invention (unit : mg)				
	wafer 100a	wafer 100b	wafer 100c	average
pad-02	46.9	28.6	26.3	33.93
pad-04	41.2	42.1	36.2	39.83
pad-06	42.1	34.8	45.8	40.9
pad-08	44.2	36.2	63.2	47.87
pad-10	37.1	37.9	46.7	40.57
pad-12	43.5	40.6	37.3	40.46
pad-14	38.3	38.5	49.4	42.23
pad-16	35.4	33.3	35.8	34.83
pad-18	36.5	33.2	37.9	35.87
pad-20	32.2	33.1	32.0	32.43
pad-22	32.4	33.3	30.5	32.07
pad-24	30.6	32.2	31.0	31.27
pad-26	36.0	32.7	30.1	32.93
pad-28	34.2	32.8	30.0	32.33
pad-30	34.8	36.5	29.5	33.60
pad-32	32.1	46.4	38.6	39.03
pad-34	30.6	34.1	35.5	33.40
pad-36	38.5	26.8	38.5	34.60
pad-38	35.1	36.0	30.1	33.73
pad-40	30.2	30.8	33.1	31.37

TABLE-2(a)

The wire pull test of conventional bond pads (unit : mg)				
	wafer 100a	wafer 100b	wafer 100c	average
pad-01	10.2	9.9	9.1	9.73
pad-03	8.3	8.7	7.3	8.10
pad-05	9.0	9.8	9.4	9.40
pad-07	10.0	10.8	9.2	10.00
pad-09	10.1	10.1	9.8	10.00
pad-11	10.0	9.6	9.7	9.77
pad-13	9.2	9.5	9.3	9.33
pad-15	9.0	8.8	8.8	8.87
pad-17	9.3	8.5	8.9	8.90
pad-19	9.9	9.8	9.3	9.67
pad-21	9.8	8.7	7.8	8.77
pad-23	8.0	7.9	9.7	8.53
pad-25	9.1	8.7	8.7	8.83
pad-27	8.9	8.7	8.9	8.83
pad-29	7.9	7.6	7.5	7.66
pad-31	7.3	7.6	5.3	6.73
pad-33	8.4	7.0	6.1	7.17
pad-35	7.3	8.3	5.5	7.03
pad-37	6.9	7.1	5.4	6.47
pad-39	7.2	6.2	7.7	7.03
average	8.84	8.665	8.17	8.558

TABLE-2(b)

The ball shear test of conventional bond pads (unit : mg)				
	wafer 100a	wafer 100b	wafer 100c	average
pad-01	40.0	40.0	44.2	41.53
pad-03	49.4	39.8	43.1	44.1
pad-05	41.5	36.1	39.9	39.17
pad-07	46.4	33.4	53.9	44.57
pad-09	43.8	37.2	44.2	41.73
pad-11	38.8	43.7	40.2	40.90
pad-13	40.1	41.0	44.1	41.73
pad-15	37.7	41.5	39.9	39.70
pad-17	37.3	32.3	53.1	40.90
pad-19	37.9	37.2	37.0	37.36
pad-21	41.0	40.1	36.4	39.17
pad-23	39.0	40.1	36.9	38.67
pad-25	38.8	40.5	35.4	38.23

TABLE-2(b)-continued

The ball shear test of conventional bond pads (unit : mg)				
	wafer 100a	wafer 100b	wafer 100c	average
pad-27	39.1	40.0	39.5	39.53
pad-29	35.7	40.9	34.3	36.97
pad-31	43.0	47.6	40.6	43.73
pad-33	40.6	43.6	32.3	38.83
pad-35	38.2	42.1	32.1	37.47
pad-37	39.9	37.4	38.8	38.70
pad-39	40.4	33.0	31.5	34.97
average	40.430	39.395	39.870	39.898

As is understood by a person skilled in the art, the foregoing preferred embodiments of the present invention are illustrated of the present invention rather than limiting of the present invention. It is intended to cover various modifications and similar arrangements included within the spirit and scope of the appended claims, the scope of which should be accorded the broadest interpretation so as to encompass all such modifications and similar structure.

What is claimed is:

1. A structure for improving the firmness of bond wires, comprising:

a composition layer formed on an insulator layer to serve as a part of a multi-level interconnection, said composition layer being composed with at least one conductive layer and at least one dielectric layer thereon, said conductive layer of said composition layer including a regular or an irregular layout pattern to obtain a rough upper surface of said dielectric layer;

a bond pad conductive layer formed on said dielectric layer of said composition layer, and said bond pad conductive layer serves as a bond pad region;

a passivation layer formed on said bond pad conductive layer;

a plurality of bond pad windows in said passivation layer to expose said bond pad conductive layer; and

a plurality of bond wires formed in said bond pad windows to couple to an external circuit.

2. The structure according to claim 1, under said composition layer further comprising:

a substrate;

an internal circuit formed on said substrate;

an insulator layer formed on said internal circuit;

a plurality of contact windows formed in said insulator layer; and

a plurality of plugs formed in said contact windows.

3. The structure according to claim 1, wherein a top and a bottom layer of said composition layer are a dielectric layer and a conductive layer, respectively, wherein said dielectric layers of said composition layer include a plurality of vias and a plurality of via plugs.

4. The structure for improving the firmness of bond wires according to claim 1, wherein said regular layout pattern is selected from a group consisting of a matrix composed with a plurality of squares—a matrix composed with a plurality of round dots—a ring composed with a plurality of concentric rings—a cross shaped trench, a “#” shaped trench and the combination thereof.



7

5. The structure for improving the firmness of bond wires according to claim 1, wherein said irregular layout pattern is selected from a group consisting of polygons and a pattern with a plurality of squares of several sizes, and the combination thereof.

6. The structure for improving the firmness of bond wires according to claim 1 wherein said conductive layers of said

8

composition layer and said bond pad conductive layer comprise metal.

7. The structure for improving the firmness of bond wires according to claim 1, wherein said conductive layer comprises Al—Si—Cu or Al—Cu.

\* \* \* \* \*